

10/31/00 960 U.S. PTO

11-02-00

A



23932

PATENT TRADEMARK OFFICE

Patent Application
Docket No. 34650-566PT

09/30/00 10/31/00 960 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Anders Borgstrom, Magnus Hollström, and Torbjörn Gärdenfors

For: SPECIALLY FORMATTED PAPER BASED APPLICATIONS OF A MOBILE PHONE

BOX PATENT APPLICATION

Assistant Commissioner

for Patents

Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL 524 961 718 US

Date of Deposit: October 31, 2000

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Type or Print Name: Carolyn Bova

Signature

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

X Specification, claims and abstract of the above-referenced patent application (total of 62 pages)

X 9 sheet(s) of drawing(s) (___ formal/ x informal).

X Combined Declaration and Power of Attorney (unexecuted).

___ An Assignment of the invention to: Telefonaktiebolaget LM Ericsson (publ)

___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.

X Other (specify): Acknowledgment postcard.

___ This application is a:

- ___ Continuation
- ___ Divisional
- ___ Continuation-In-Part

09/30/00 10/31/00 960 U.S. PTO

960 U.S.
10/31/00
now pending.

of prior copending parent application Serial No. _____ filed on _____
now pending.

Please amend the application to insert the following line in the beginning of the specification:

--This application is a Continuation of prior application Serial No. _____ filed on _____, now pending.--

In the event that a petition to extend time under 37 CFR 1.136 is necessary in the parent application to maintain copendency for this application, a petition for an extension of the necessary time to maintain copendency is hereby requested for the parent application and the Commissioner is hereby authorized to debit our Account Number 10-0447 for the necessary fees.

The filing fee has been calculated as shown below:

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$710
TOTAL CLAIMS	32-20	12	\$18	216
INDEPENDENT CLAIMS	4-3	1	\$80	80
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$260	
TOTAL FEES:				\$1,006
Deduct one-half of fee for Small Entity				-
ASSIGNMENT RECORDAL FEE			\$40	
TOTAL AMOUNT DUE:				\$1,006

— Please charge my Deposit Account No. 10-0447 in the amount of \$ _____

— Check(s) in the amount of \$ _____ is/are attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

— The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447.

— Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

— The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

Smy Carter

Figure 1 consists of 12 sub-graphs labeled (a) through (l), each showing the growth of *E. coli* O157:H7 in ground beef under different treatment conditions. The y-axis for all graphs is \log_{10} CFU/g, ranging from 0 to 10. The x-axis is time in hours, ranging from 0 to 120. The graphs show various growth curves, with some treatments resulting in higher final counts than others. For example, graph (a) shows a control group reaching approximately 10 \log_{10} CFU/g, while graph (l) shows a treatment that significantly reduces growth, reaching only about 2 \log_{10} CFU/g by 120 hours.

CERTIFICATE OF MAILING BY EXPRESS MAIL
"EXPRESS MAIL" Mailing Label
No.EL 524 961 718 US
Date of Deposit October 31, 2000
I hereby certify that this paper or fee
is being deposited with the U.S. Postal
Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on
the date indicated above and is
addressed to the Assistant Commissioner
for Patents, Box Patent Application,
Washington, D.C. 20231
Type or Print Name Carolyn Bova
<i>Carolyn Bova</i>
Signature

**SPECIALLY FORMATTED PAPER BASED
APPLICATIONS OF A MOBILE PHONE**

REFERENCE TO EARLIER FILED PROVISIONAL APPLICATIONS

This patent application claims the benefit of
priority from, and incorporates by reference the entire
disclosure of, co-pending U.S. Provisional Patent
Application Serial Nos. 60/182,742, filed on February 16,
2000, 60/190,343, filed on March 16, 2000, and 60/192,662,
filed on March 28, 2000.

CROSS REFERENCE TO RELATED APPLICATION

The present application for patent is related to and hereby incorporates by reference the subject matter disclosed in U.S. Patent Application Serial Nos.

5 _____ (Attorney Docket No.34650-569PT),
entitled "Method and System for Using an Electronic
Reading Device as a General Application Input and
Navigation Interface"; _____ (Attorney Docket
No.34650-578PT), entitled "Predefined Electronic Pen
10 Applications in Specially Formatted Paper";
_____ (Attorney Docket No. 34650-579PT),
entitled "A System and Method for Operating an Electronic
Reading Device User Interface"; _____
(Attorney Docket No. 34650-601PT), entitled "Method and
15 System for Using an Electronic Reading Device on Non-paper
Devices"; _____ (Attorney Docket No. 34650-
602PT), entitled "Multi-layer Reading Device";
_____ (Attorney Docket No. 34650-604PT),
entitled, "Method and System for Configuring and Unlocking
20 an Electronic Reading Device"; _____ (Attorney
Docket No. 34650-606PT), entitled "Printer Pen";
_____ (Attorney Docket No. 34650-607PT),
entitled "Method and System for Electronically Recording

Transactions and Performing Security Function";
_____ (Attorney Docket No. 34650-608PT),
entitled "Electronic Pen with Ink On/ink off Function and
Paper Touch Sensing"; _____ (Attorney Docket
5 No. 34650-654PT), entitled "Method and System for Handling
FIFO and Position Data in Connection with an Electronic
Reading Device"; _____ (Attorney Docket No.
34650-655PT), entitled "Hyperlink Applications for an
Electronic Reading Device"; _____ (Attorney
10 Docket No. 34650-656PT), entitled "Measuring Applications
for an Electronic Reading Device"; _____
(Attorney Docket No. 34650-657PT), entitled "Method and
System for Controlling an Electronic Utility Device Using
an Electronic Reading Device"; and _____
15 (Attorney Docket No. 34650-658PT), entitled "Positioning
Applications for an Electronic Reading Device"; and
_____ (Attorney Docket No. 34650-673PT),
entitled "Method for Sharing Information Between
Electronic Reading Devices"; and in U.S. Provisional
20 Patent Application Serial Nos. _____
(Attorney Docket No. 34650-671PL), entitled "Electronic Pen
for E-Commerce Implementations"; and _____
(Attorney Docket No. 34650-672PL), entitled "Electronic Pen

Help Feedback and Information Retrieval"; all filed
concurrently herewith.

BACKGROUND OF THE INVENTION

Technical Field of the Invention

5 The present invention relates in general to the
communications field, and in particular to an interaction
of an electronic reading device with an address pattern.

Description of Related Art

10 Numerous man-machine-interfaces (MMIs) exist for
accepting user input and controlling user interaction with
desktop and portable computers, personal digital
assistance (PDAs), mobile phones, and other types of
electronic devices. For example, a keyboard can be used
to accept typed input and other types of commands, a mouse
15 or a track-ball can be used to provide relative motion
input as well as various types of point-and-click
selections, a keypad can be used to provide input of
numerical data and functional commands, navigational keys,
or scrolling wheels can be used for scrolling lists or
20 otherwise repositioning a cursor, voice recognition can be
used for performing certain operations, and various types

of touchpads or touchscreens can be used to provide absolute positional coordinate inputs. Each type of mechanism for accepting input and for supporting user interaction has benefits and disadvantages in terms of size, convenience, flexibility, responsiveness, and easy of use. Generally, the selection of a particular type of MMI is dependent upon the function of the application and the degree and type of interaction required.

With the ever expanding capabilities and availability of applications both on the Internet and the area of wireless technology, there continues to be a need to develop and provide new MMIs for accepting input and interacting with users. In particular, some of the existing technologies suffer from drawbacks or limitations, such as size and flexibility, that make them impractical and/or inconvenient to use in some situations. For example, MMIs that are typically used with mobile phones are not very fast and are not particularly user friendly, especially for sending long SMS messages or changing a lot of data in the device. Typically, long messages are entered using T9 (i.e., word predictive input), a keyboard attached to the phone (i.e., a chatboard), a pen on a touch sensitive screen, or a

of touchpads or touchscreens can be used to provide absolute positional coordinate inputs. Each type of mechanism for accepting input and for supporting user interaction has benefits and disadvantages in terms of size, convenience, flexibility, responsiveness, and easy of use. Generally, the selection of a particular type of MMI is dependent upon the function of the application and the degree and type of interaction required.

With the ever expanding capabilities and availability of applications both on the Internet and the area of wireless technology, there continues to be a need to develop and provide new MMIs for accepting input and interacting with users. In particular, some of the existing technologies suffer from drawbacks or limitations, such as size and flexibility, that make them impractical and/or inconvenient to use in some situations. For example, MMIs that are typically used with mobile phones are not very fast and are not particularly user friendly, especially for sending long SMS messages or changing a lot of data in the device. Typically, long messages are entered using T9 (i.e., word predictive input), a keyboard attached to the phone (i.e., a chatboard), a pen on a touch sensitive screen, or a

numeric keypad where each key has to be pressed more than
once to enter certain letters. Each of these alternatives
suffer from a lack of speed and/or user-friendliness. By
expanding the range of possible MMIs for supporting user
5 interaction, application developers and end-users can have
greater flexibility in the selection of input devices.
Preferably, any such new mechanisms will provide increased
flexibility and will maximize user convenience. In
addition, the development of new mechanisms for
10 interacting with users can expand the realm of potential
applications.

For example, while a keyboard typically provides a
great deal of flexibility, particularly when it is used in
connection with a mouse, a touchscreen, or other
15 navigational device, its size makes it inconvenient in
many cases, especially in the wireless context.

SUMMARY OF THE INVENTION

The present invention comprises a method and system
for data entry using an electronic pen. At least one
20 position on a specially formatted surface is detected
using an optical detector of the electronic pen that
detects a portion of an address pattern of the specially

formatted surface. Data relating to the at least one
detected position is transmitted via a wireless interface
to a separate electronic device. The data received by the
electronic device is then used to perform an operation
5 corresponding to an area of the predefined address pattern
that contains the at least one detected position.

In accordance with a preferred embodiment of the
invention, the separate electronic device is a mobile
phone, PDA, personal or laptop computer, or other
10 electronic device. The position on the address pattern at
which the electronic pen is detected can be used to
perform one of a variety of different functions, such as
manipulating settings; navigating an options menu;
performing mouse-like navigation on a screen of the
15 separate electronic device; entering, manipulating, or
deleting data in a personal information management
application; composing an email, telefax, or short message
service (SMS) message; dialing a telephone number; and the
like.

20 Preferably, a plurality of positions are detected by
periodically detecting (e.g., numerous times per second) a
portion of the address pattern that is currently adjacent
to the optical sensor of the electronic pen. Accordingly,

the detected positions provide an electronic representation of handwritten text or drawn images. The handwritten or drawn text or images can then be stored or converted into ASCII text. Furthermore, the information written or otherwise input using the electronic pen can be utilized by a user of a mobile phone, PDA, television, personal computer, or other electronic device to execute a function within the mobile phone, PDA, television, personal computer, or other device.

10 BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is made to the following detailed description taken in conjunction with the accompanying drawings wherein:

15 FIGURE 1 is a block diagram of a system in which an electronic pen can be used as an input device;

FIGURE 2 is a schematic diagram of a system for supporting use of the electronic pen described in connection with FIGURE 1;

20 FIGURE 3 is an illustration of the protocol stacks that can be used in the case of local communications between an electronic pen and an electronic pen client;

FIGURE 4 is an illustration of protocol stacks that can be used when an electronic pen and an electronic pen client communicate with one another via an Internet connection;

5 FIGURE 5 is an illustration of a protocol stack for communications between an electronic pen client and each of the supporting entities when the electronic pen client is not located within a server on the Internet;

10 FIGURE 6 is an illustration of protocol stacks that are used for communications between an electronic pen client and each of the supporting entities when the electronic pen client is located on the Internet;

15 FIGURE 7 is a block diagram of the electronic pen logic that handles positions, strokes, actions, and grid descriptions;

FIGURE 8 is a block diagram of a state machine for the electronic pen control block shown in FIGURE 7;

FIGURE 9 is a block diagram of a state machine for an electronic pen client;

20 FIGURES 10A-10C are a message flow and signaling diagram illustrating the operation of the electronic pen system shown and discussed in connection with FIGURE 2;

FIGURE 11 is an illustration of a reusable calendar reentry sheet;

FIGURE 12 is an illustration of an example of a reusable phone settings entry sheet; and

5 FIGURES 13A and 13B are illustrations of an electronic pen 10 having a paper touch sensor.

DETAILED DESCRIPTION OF THE INVENTION

10 The present invention relates to a system in which an electronic reading device, such as an electronic pen, an electronic mouse, or a hand scanner, works in cooperation with an address pattern (e.g., a specially formatted paper) to provide for a detection of a location of the electronic reading device over the address pattern. For instance, a pattern of dots can be defined such that, by examining a very small portion of the pattern, a precise location in the overall pattern can be determined. In fact, it is possible to define a pattern that has the size of 73,000,000,000,000 A4 pages, which is equivalent to half the size of the entire United States. Portions of the pattern can be placed on sheets of paper or other objects.

20 Then, using an electronic scanner pen that can detect the dots in the pattern, it is possible to detect the

location of the pen with respect to the unique pattern.

For example, when such a pen is used in connection with a specially formatted paper, the pen can detect its position (e.g., using a built in camera) by detecting a 3 mm by 3

5 mm portion of the pattern. By taking approximately 100 pictures per second, the pen is capable of determining its exact position to within 0.1 mm or less. This system can be used to provide user input, to facilitate user interaction, or to store handwritten notes or drawings.

10 Moreover, by associating portions of the overall pattern with certain applications, such a system can be used to interact with wide variety of applications.

Referring now to FIGURE 1, there is illustrated an example of a system 2 in which an electronic pen can be used as an input device. The electronic pen includes an ink cartridge and is capable of writing in a typical
15 fashion. The electronic pen 10, however, includes some type of sensor (e.g., a built-in camera) that is used for detecting an address pattern on a specially formatted piece of paper 12. In particular, the paper 12 is
20 formatted with a small portion of a large address pattern such that when the electronic pen 10 is used to write on

or otherwise make marks on the paper 12, the writings or markings can be electronically detected and stored.

As an example, the paper 12 might constitute a form that can be used for sending an e-mail. Thus, the paper
5 12 might include a space for writing in the e-mail address of an intended recipient, a space for writing a subject of the e-mail, and a space for writing the body of the e-mail. As the electronic pen 10 is used to fill in each of the spaces, the position and movement of the electronic
10 pen 10 on the paper 12 can be determined by repeatedly detecting the current x, y coordinates of the pen 10 (e.g., at rate of 100 frames per second). The markings can then be converted into ASCII text using an appropriate handwriting recognition program. Once the user completes
15 the form, the e-mail can be sent, for example, by checking a send box at a predetermined location on the paper 12.

Preferably, the coordinate information collected by the pen 10 is sent by a short range radio transmitter in the electronic pen 10 to a nearby mobile station 14 using
20 a short range radio interface 16 such as a local wireless radio link (e.g., a local wireless radio link supported by Ericsson's Bluetooth™ wireless communications technology). Alternatively, instead of using a mobile station 14, the

coordinate information could also be sent to, for instance, a desktop or portable computer, a personal digital assistant (PDA), a television, or a Bluetooth terminal. Moreover, instead of using a local wireless
5 radio link, other types of local wireless links, such as Global System for Mobile Communication (GSM), such as inductive coupling and infrared light; other types of radio links; or wired transmission media, such as a cable can also be used. The information can then be forwarded
10 via an appropriate link, such as a cellular air interface 18, to a base station 20 or other network node.

Referring now to FIGURE 2, there is illustrated a schematic diagram of a system 2 for supporting use of the electronic pen 10 described in connection with FIGURE 1.
15 Throughout the subsequent discussion, the system 2 is described primarily in connection with an electronic pen 10. It will be understood, however, that the invention and the underlying system 2 can instead use any type of electronic reading device, such as an electronic pen, an
20 electronic mouse, or a hand scanner. As shown in FIGURE 2, the system 2 includes six different entities, including the electronic pen 10, electronic pen client 22, a control node 24, a name server 26, a base translator 28, and an

application server 30. Although these various devices are described and depicted separately, it is also possible to combine two or more of the entities into the same device (e.g., the electronic pen 10 and electronic pen client 22
5 can be contained in the same device). The electronic pen 10 is responsible for detecting positions on the address pattern, producing actions, and sending information to the electronic pen client 22. In addition to being able to leave pen markings, some electronic pens can also have the
10 ability to produce other types of output, such as sound, vibration, or flashing lights. The electronic pen 10 includes a memory for storing a current grid, which comprises information relating to an area of the address pattern that is near the most recently detected position
15 of the electronic pen 10. When the electronic pen 10 is loaded with the current grid, it knows what actions to take based on the positions that are read from the address pattern. When the electronic pen 10 is first turned on or when it moves to an area outside of the current grid, the
20 electronic pen 10 must first request a new grid description before it can continue processing information. In such a situation, the electronic pen 10 requests a new grid description from the electronic pen client 22.

The electronic pen client 22 can be located in a mobile station 14, in a PDA, in a television, in a desktop or portable computer, in the electronic pen 10 itself, in a server somewhere on the Internet, or in another device.

5 The electronic pen client 22 serves as the center of communications in the overall system 2. In particular, the electronic pen client 22 receives new grid requests and action requests from the electronic pen 10 and responds to these requests by contacting an appropriate
10 entity within the overall system 2 to properly respond to the request from the electronic pen 10. Furthermore, when the electronic pen 10 is being used in connection with a particular application, the electronic pen client 22 can store the application and/or any corresponding data
15 received from the electronic pen 10 to facilitate processing and use of the application.

The name server 26 is used for translating a detected position on the address pattern into a Uniform Resource Location (URL) associated with that position. Different
20 portions of the address pattern are assigned to different applications. Neither the electronic pen 10 nor the electronic pen client 22, however, is aware of all of the different applications and the particular areas assigned

to each application. Thus, when the electronic pen 10 detects a new or unknown position, it forwards the position information to the electronic pen client 22, which in turn sends the information to the name server 26.

5 The name server 26 then identifies an application associated with the received position and retrieves a URL where a description of the particular application can be found. The retrieved URL can then be used by the electronic pen client 22 to retrieve the application
10 description.

As an alternative, the name server 26 can comprise a global name server that keeps track of a location, in the form of URLs to local name servers, where more information can be found about different addresses in the pattern.
15 Similarly, each local name server can use other local name servers to obtain the necessary information, i.e., to convert a position into a URL where an application description can be found. At the lowest level, the local electronic pen client should know all the paper addresses
20 that are within a specific application or applications.

There are some services that should be available in the overall system 2 for which it is inconvenient or not feasible to support such services in the electronic pen 10

or the electronic pen client 22. In such a case, the base translator 28 can be used to support the services. For example, the base translator 28 might contain handwriting recognition software for converting pen actions into text or for converting pen actions into a predefined set of symbols. When such services are needed, the electronic pen client 22 can send a request to the base translator 28 along with the necessary data, and the base translator 28 can perform the requested service.

Another entity in the system 2 is a control node 24. The control node 24 is used for responding to actions in a standardized way. For example, the control node 24 can be used to respond to certain generic functions, such as "cancel" or "submit" functions, in a consistent manner without regard to the particular application that is currently active.

In addition, the control node 24 is used for creating streaming-like applications. For instance, some applications might require that the positions on the address pattern that are detected by the electronic pen 10 be immediately sent, upon detection, to the electronic pen client 22 for use by the application (i.e., the electronic pen 10 does not wait to transmit the position data until a

complete stroke is detected or until a "send" field is touched). One example is an application that is used to control an industrial robot in a warehouse. In such a case, the application description that is loaded onto the electronic pen server 22 can include instructions that all
5 positions be streamed to a control node 24. As a result, the control node 24 can receive the positions in real time and can control the robot without waiting for the form (i.e., the current grid) to be completed. Thus, the
10 control node 24 can perform a real-time translation from detected positions to a responsive action, such as moving an object (e.g., a robot, a valve, etc.) or controlling a process.

The application server 30 is a regular web or
15 wireless application protocol (WAP) server that supports an application associated with a particular area of the address pattern. The application server 30 stores an application description and provides the application description to the electronic pen client 22 upon request.
20 In addition, the application server 30 receives input data from the electronic pen 10 via the electronic pen client 22. For example, the application description might define a number of data entry areas on a form. Thus when data is

entered on the form by the electronic pen 10, the data is received by the electronic pen client 22, converted into text using handwriting recognition software, and forwarded to the application server 30, which stores the data or otherwise processes the data in accordance with the function of the application.

Referring now to FIGURES 3 through 6 there are illustrated various examples of protocol stacks that can be used for communicating between the entities shown in FIGURE 2. Generally, however, such protocols apply however, only if the two communicating entities are implemented in different devices. If two or more entities are combined into one device, a proprietary protocol can be used to communicate between the entities. FIGURE 3 illustrates the protocol stacks that can be used in the case of local communications (e.g., using Bluetooth™) between the electronic pen 10 and the electronic pen client 22. If, on the other hand, the electronic pen 10 and the electronic pen client 22 communicate with one another via an Internet connection, the protocol stacks depicted in FIGURE 4 will be used. FIGURE 5 illustrates a protocol stack for communicating between the electronic pen client and each of the supporting entities, such as

the name server 26, the control node 24, the base
translator 28, and the application server 30, when the
electronic pen client 22 is not contained within a server
on the Internet (e.g., such as when the electronic pen
5 client 22 is located in a mobile phone 14). Finally,
FIGURE 6 depicts the protocol stacks that are used when
the electronic pen client 22 is located on the Internet.

There are a number of procedures that can be used by
the various entities in the system 2 to allow the system
10 to operate properly. When the electronic pen 10 detects a
position on the address pattern that is not within its
currently loaded grid or when the electronic pen 10 has no
currently loaded grid, the electronic pen 10 initiates a
new grid procedure. The new grid procedure involves
15 sending a new grid request object to the electronic pen
client 22. The new grid request object contains the newly
detected position, a description of the actions that the
electronic pen 10 can natively support, and a description
of the output signals that the electronic pen 10 supports.
20 The reply to a new grid request object is a grid
description, which can be provided by the electronic pen
client 22 from its own internal memory or from the
information provided by an application server 30.

Generally, the electronic pen client 22 extracts the grid description from an application description received from the application server 30. The grid description should only contain action-field-types that the electronic pen 10
5 has indicated that it natively supports, which means that the electronic pen client 22 in some cases should convert the extracted grid description into a format that the electronic pen 10 can understand.

In some situations, it may be necessary for the
10 electronic pen 10 to unload its current grid at the request of the electronic pen client 22. In such a case, the electronic pen client 22 sends an empty grid description to the electronic pen 10, thereby causing the electronic pen 10 to unload its current grid. This can
15 occur, for example, when a particular application is complete or when a new grid description request received from the electronic pen 10 cannot be fulfilled, such as when the position received from the electronic pen 10 is not registered in the name server 26.

20 Another similar message is the empty grid description with a grid exception. When the electronic pen 10 requests a new grid description from the electronic pen client 22, the electronic pen client 22 uses the detected

position specified in the request to ask the name server
26 for a URL where the application description can be
found. If no URL is returned, the electronic pen client
22 can send an empty grid description with a grid
5 exception to the electronic pen 10. The grid exception
comprises a rectangle or other shape indicating the area
around the detected position where no registered
applications can be found. Preferably, the indicated area
is as large as possible so that the electronic pen 10
10 and/or electronic pen client 22 know the extent of the
surrounding area that is unassigned and do not have to
repeatedly send requests to the name server 26. Thus, the
empty grid description with a grid exception causes the
electronic pen 10 to unload its current grid and also
15 informs the electronic pen 10 of an area surrounding the
detected position that can essentially be ignored because
its is not associated with any application.

The procedure that is used when the electronic pen 10
detects a new position is a find application description
20 location procedure. This procedure is used by the
electronic pen client 22 to translate a detected position
received from the electronic pen 10 into a URL where a
description of an application corresponding to that

position can be found. The procedure involves sending a request from the electronic pen client 22 to the name server 26 containing identification of the detected position. The name server 26 responds by sending a reply to the electronic pen client 22 containing a URL where an application description can be found or, if the detected position is not registered in the name server 26, containing an indication that no associated application is known to exist.

Once the electronic pen client 22 knows the URL where an application description can be found, the electronic pen client 22 can initiate a get application description procedure, which allows the electronic pen client 22 to retrieve the application description from the application server 30. In particular, the electronic pen client 22 sends an application description request containing a unique ID for the requesting electronic pen 10 and/or electronic pen client 22 to the application server 30 located at the URL address provided by the name server 26.

In response, the application server 30 provides an application description object to the electronic pen client 22, which loads the application onto the electronic pen client 22. The application description object is

similar to an HTML form with some additions and
modifications.

Furthermore, the application description object can
be sent from the application server 30 to the electronic
5 pen client 22 in response to a submitted form (i.e., a
submission of one completed form might automatically
result in a new form being loaded onto the electronic pen
client 22). A related procedure is the application submit
procedure, which is used by the electronic pen client 22
10 when the user of the electronic pen 10 selects a "submit"
field in a form. In response to the selection of the
"submit" field, the electronic pen client 22 will submit
the form content in accordance with instructions received
in the application description. Typically, the electronic
15 pen client 22 will submit the form content, in the same
way as a regular web browser, to a URL specified in a form
tag of the application description.

When an action that can be handled by the electronic
pen 10 itself is generated, an action procedure is
20 initiated by the electronic pen 10 to send an action
request object to the electronic pen client 22. If the
electronic pen client 22 cannot translate the action into
a field value itself, the electronic pen client 22 further

forwards the request to a base translator 28 for
translating the action into a field value. In response to
the action request object, an action reply object is sent
from the electronic pen client 22 to the electronic pen
5 10. The action reply object contains output information
that indicates to the electronic pen 10 which outputs
signals to use. The output information, however, cannot
be of type that the electronic pen 10 has previously
indicated that it does not support. In some instances, the
10 action reply object might contain a new grid description.
In such a case the electronic pen 10 will unload its
current grid description and load the new grid
description. Similarly, if the action reply object
contains an empty grid description, the electronic pen 10
15 will simply unload its current grid description.

The action request object is also sometimes used to
specify actions that should be processed by the control
node 24. In this instance, the electronic pen client 22
initiates a control procedure by forwarding the received
20 action to the appropriate control node 24. As a result,
the control node 24 sends an action reply object to the
electronic pen client 22.

The operation of the electronic pen 10 will now be discussed in greater detail. Each electronic pen 10 has a unique pen ID, which is sent to the application server 30 when an application description is requested. The

5 electronic pen ID allows the application to identify the particular user that is using the application and to distinguish between multiple concurrent users of the same application, such as when different electronic pens 10 are being used in connection with separate sheets of paper
10 that each contain the same portion of the address pattern.

Referring now to FIGURE 7, there is illustrated a block diagram of the electronic pen processor logic that handles positions, strokes, actions, and grid descriptions for the electronic pen 10. The electronic pen 10 includes
15 a control block 32 for controlling the operation of the electronic pen 10. A grid description block 34 represents a memory location that stores a current grid description. At any given time, the electronic pen 10 can be in either of two modes. In a first mode, a grid description is
20 loaded, while in a second mode, the grid description block 34 is not loaded with a current grid description.

As the electronic pen 10 moves across an address pattern, the electronic pen 10 periodically (e.g., every

1/100 of a second) detects a position by detecting all of the dots within, for example, a 3mm by 3mm area. Each detected position is forwarded (as indicated at 36) to a position first in first out (FIFO) block 38, which acts as
5 a buffer for temporarily storing the detected positions. The clocking of the position FIFO block 38 is controlled by the control block 32 (as indicated at 40).

The detected position is fed from the position FIFO block 38 (as indicated at 42) to an in grid detector 44.
10 The in grid detector 44 retrieves data from the grid description block 34 (as indicated at 46) and determines whether the received position is within the loaded grid description. If not, the in grid detector 44 notifies the control block 32, which in turn initiates a request for a
15 new grid. When the detected position is within the current grid, the position is then sent (as indicated at 50) from the in grid detector 44 to a stroke engine 52. The stroke engine 52 converts the received positions into strokes, which are then sent (as indicated at 54) to an
20 action engine 56. A complete stroke is created when the electronic pen 10 is lifted from the paper or when it moves outside of the grid field where the stroke began. Finally, the action engine 56 converts the received stroke

into an action that can be sent to the electronic pen client 22. By using grid action-field-types, the action engine knows which type of action to produce for a specific grid field.

5 Referring now to FIGURE 8, there is illustrated a block diagram of a state machine for the control block 32 shown in FIGURE 7. In this figure, events are indicated in capital letters, while tasks associated with the event are depicted in brackets. The process starts at step 60
10 with a start up event 62, which causes the position FIFO block 38 to begin receiving detected positions. Initially, the electronic pen 10 is in a no grid loaded state 64, which means that the electronic pen 10 does not have a grid loaded in the grid description block 34. As a
15 result, the control block 32 generates an outside grid indication 66, thereby causing the electronic pen 10 to send the request for a new grid description to the electronic pen client 22 (i.e., in accordance with the new grid procedure) and to stop the FIFO buffer 38. At this
20 point, the electronic pen 10 enters a waiting for grid state 68.

Once the new grid has been received (as indicated at 70), the control block 32 moves to a grid loaded state 72,

at which time the new grid is loaded into the grid
description block 34 and the position FIFO block 38
resumes operation. On the other hand, if no grid is
received (as indicated at 74), at least a portion of the
5 positions stored in the FIFO buffer 38 are erased. Which
part of the FIFO buffer to erase is determined by the grid
exception area, if any, in the received empty grid
description. Accordingly, all positions stored in the
FIFO buffer 38 that are within the grid exception area
10 should be erased. If no grid exception is received, the
stroke associated with the position is erased. In
addition, the FIFO block 38 resumes operation and the
control block 32 moves into the no grid loaded state 64.

When the control block 32 is in the grid loaded state
15 72, a current grid is loaded in the grid description block
34. While the control block 32 remains in this state 72,
the position FIFO block 38 continues to receive detected
positions and passes them on to the stroke engine 52 and
action engine 56. Actions produced by the action engine
20 56 are sent (as indicated at 58) to the electronic pen
client 22 (i.e., in accordance with the action procedure
described above).

At some point, an outside grid indication 74 may be received by the control block 32 from the in grid detector 44. The outside grid event 74 causes the FIFO block 38 to stop generating new positions. In addition, the
5 electronic pen 10 enters a flushing stroke and action state 76 wherein the strokes that are currently in the stroke engine 52 and the actions that are currently in the action engine 56 are flushed to the electronic pen client 22. Once the stroke engine 52 and action engine 56 have
10 been fully flushed (as indicated at 78), the electronic pen 10 sends a request for a new grid to the electronic pen client 22 and unloads the current grid. The control block 32 then moves back into the waiting for grid state 68.

15 As a general matter, the electronic pen 10 may be capable of supporting various different types of output, including audio, such as warning tones; visual, such as a flashing light; tactile, such as vibration; and/or ink. In some cases, it might be desirable to allow the user of the
20 electronic pen 10 to turn off the ink of the pen 10, such as when the electronic pen is being used on a portion of the address pattern that is public or shared or when the user wants to be able to reuse the current sheet of paper.

The electronic pen client 22 will now be described in greater detail. Generally, the electronic pen client 22 is analogous to a regular web browser. It is responsible for loading applications from application servers 30 and
5 for handling input from the electronic pen 10. Preferably, the electronic pen client 22 is located in a separate device from the electronic pen 10 itself. This is because it is desirable to minimize the size and power supply requirements of the electronic pen 10, which will
10 likely be adversely affected by the processing resources and memory necessary to support the functions of the electronic pen client 22.

Referring now to FIGURE 9, there is illustrated a block diagram of a state machine for the electronic pen
15 client 22. Initially, the electronic pen client 22 is in a no application loaded state 80. The electronic pen client 22 recognizes only one signal when in this state 80, namely a new grid request from the electronic pen 10. Such a request causes a load grid indication event 82.
20 The electronic pen client 22 responds by sending a request to the name server 26 to translate a position contained within the new grid request into a URL where the application description can be found (i.e., in accordance

with the find application location procedure). Next, the electronic pen client 22 enters a waiting for application description URL state 84. If no URL for the application description can be found (as indicated at 86), the
5 electronic pen client 22 sends a new grid reply to the electronic pen 10, wherein the reply contains an empty grid description with a grid exception. As a result, the electronic pen client 22 returns to the no application loaded state 80.

10 If a URL for the application description is received from the name server 26 (as indicated at 88), the electronic pen client 22 sends a request to the application server 30 to retrieve the application description (i.e., in accordance with the get application
15 description procedure). Accordingly, the electronic pen client 22 enters a waiting for application description state 90.

If the electronic pen client 22 does not receive an application description from the application server 30 (as
20 indicated at 92), a new grid reply is sent by the electronic pen client 22 to the electronic pen 10 wherein the reply contains an empty grid. Thus, the electronic pen client 22 returns to the no application loaded state

80. If, however, the electronic pen client 22 does receive an application description from the application server 30 (as indicated at 94), the electronic pen client 22 sends a new grid reply to the electronic pen 10
5 containing a new grid description, and the electronic pen client 22 loads the application in its memory. In addition, the electronic pen client 22 moves into an application loaded state 96.

In the application loaded state 96, five types of
10 actions can be received by the electronic pen client 22 from the electronic pen 10. First, a received action can include a request that the electronic pen client 22 cannot handle itself, in which case the electronic pen client 22 will send the action to the base translator 28 (as
15 indicated at 98). The electronic pen client 22 then moves into a waiting for response from the base translator state 100. Once a base translator response 102 is received by the electronic pen client 22, the electronic pen client 22 updates a current form or other data associated with the
20 currently loaded application and sends an action reply to the electronic pen 10 with appropriate output information.

Another type of action that the electronic pen client 22 can receive from the electronic pen 10 is a request

5

10

15

20

unloaded from the electronic pen client 22, the new application description is parsed and loaded in the electronic pen client 22, an action reply is sent to the electronic pen 10 with a new grid description and with
5 appropriate output information, and finally the electronic pen client 22 returns to the application loaded state 96.

A fourth type of action that can be received by the electronic pen client 22 from the electronic pen 10 is a request to load a new grid. This action occurs, for
10 example, when a position outside of the current grid is detected by the electronic pen 10. When a new grid request is received, the electronic pen client 22 sends a request to the name server 26 (as indicated at 116) and the electronic pen client 22 returns to the waiting for
15 application description URL state 84.

Finally, a fifth type of action that can be received by the electronic pen client 22 is an action that the electronic pen client 22 can handle itself, in which case the electronic pen client 22 updates the current form and
20 sends an action reply to the electronic pen 10 with appropriate output information (as indicated at 118). The electronic pen client 22 then remains in the application loaded state 96. One type of action that the electronic

pen client 22 might be able to handle itself is a local application. For example, the electronic pen client 22 might be capable of performing certain basic functions that are defined by a local application. Thus, when the
5 electronic pen client 22 receives a new grid request, the position associated with the new grid request can be analyzed to determine if it corresponds to a local application. If so, the electronic pen client 22 can load the application description from its local memory, send a
10 new grid description to the electronic pen 10 without having to communicate with the name server 26 or the application server 30.

Another action that might be handled locally by the electronic pen client 22 relates to the selection of
15 fields within a form. When the electronic pen client 22 receives an action, the field that corresponds to that action receives focus. When this occurs, the electronic pen client 22 might display the field's value on its display or output the value by audio. In addition, the
20 electronic pen client 22 might allow the user to edit the value of the field by means other than the electronic pen 10. Yet another type of action that might be handled by the electronic pen client 22 itself are actions that

relate to a clipboard function. When a "copy" field is selected, the value of the field that had focus at the time the copy field was selected is transferred to the clipboard. Similarly, when a "paste" field is selected,
5 the value stored in the clipboard is transferred to the field that had focus at the time the paste field was selected.

Referring now to FIGURES 10A through 10C, there is shown, by way of example, a message flow and signaling
10 diagram illustrating the operation of the electronic pen system 2 depicted in and discussed in connection with FIGURE 2. Initially, the electronic pen 10 detects a first position on the address pattern at step 120 (e.g., at a location on a sheet of paper designated for composing
15 and sending e-mails). At this stage, it is assumed that the electronic pen 10 is in a no grid loaded state. Thus, in response to the detection of the first position, the electronic pen 10 sends a new grid request 122, which contains the detected position information, to the
20 electronic pen client 22. As a result, the electronic pen client 22 sends an application location request 124 containing the detected position information to the name server 26, at step 126. The name server 26 translates the

detected position into a URL where an application
description that corresponds to the detected position can
be found (e.g., a URL address for a server containing an
e-mail application), and returns an application location
5 reply 128 containing the retrieved URL to the electronic
pen client 22.

The electronic pen client 22 then sends an
application description request 130, which contains the
unique pen ID for the electronic pen 10, to the
10 application server 30. The application server 30
retrieves the application description at step 132 and
sends an application description reply 134 containing the
retrieved application description to the electronic pen
client 22. The electronic pen client 22 then parses and
15 stores the application description at step 136. This step
further involves generating a current grid description
from the application description and sending the grid
description to the electronic pen 10 in a new grid reply
138. The electronic pen 10 stores the received grid
20 description at step 140 and resumes processing of the
detected positions. Using the detected positions and the
information in the grid description (e.g., so that the
electronic pen 10 knows which fields of the e-mail form

are being filled in), the electronic pen 10 generates strokes at step 142 and generates actions at step 144 using the stroke engine 52 and action engine 56 shown in FIGURE 7.

5 Each time an action is generated that cannot be handled by the electronic pen 10 itself, an action request 146 containing a description of the action is sent from the electronic pen 10 to the electronic pen client 22. At this point, the electronic pen client 22 should determine
10 what type of action has been received so that it can respond to the action in an appropriate manner. First, it is determined whether the action requires the attention of, or otherwise should be processed in accordance with, a local application at step 148. Very basic applications or
15 frequently used applications (e.g., delete entered text), for example, might be stored locally to avoid having to contact another entity. In such a case, the electronic pen client 22 retrieves the local application at step 150 and sends an action reply 152, which can contain a new
20 grid description or other appropriate information.

 However, if it is determined at step 148 that the received action does not relate to a local application, the process continues at step 154 where it is determined

whether the received action requires processing by an external translator (e.g., handwriting recognition). If so, an action request 156 containing a description of the action is sent by the electronic pen client 22 to the base
5 translator 28. The base translator 28 processes the action at step 158 and sends an action reply 160 containing output information responsive to the received action (e.g., text corresponding to written characters) to the electronic pen client 22, which can forward the output
10 information to the electronic pen 10 in an action reply 162, if necessary.

If it is determined at step 154 that the received action does not require processing by an external translator, it is next determined whether the action
15 relates to a control application at step 164. If so, an action request 166 containing a description of the action is sent by the electronic pen client 22 to the control server 24. The control server 24 processes the received action at step 168 and, if a response is necessary,
20 returns output information responsive to the received action in an action reply 170, which is forwarded from the electronic pen client 22 to the electronic pen 10 in an action reply 172.

Assuming that it is determined at step 164 that the received action does not relate to a control function, it is next determined whether the action comprises a request to submit a form at step 174 (e.g., a selection of a

5 "send" area on the e-mail form). If so, an action request 176 containing the data entered onto the form is sent by the electronic pen client 22 to the application server 30. The application server 30 processes the form at step 178 and sends an action reply 180 containing a new application

10 description (or an empty application description) to the electronic pen client 22. The electronic pen client 22 parses and stores the new application description at step 182 and generates a new grid description from the newly received application description. The electronic pen

15 client 22 then sends an action reply 184 containing the new grid description. Although not illustrated in the figure, the electronic pen 10 will typically respond to the receipt of a new grid description by unloading its current grid description and loading the new grid

20 description into its memory.

At some point, it is assumed that the electronic pen 10 detects a position that is outside of the currently loaded grid at step 186. In response to such an event,

the electronic pen 10 sends a new grid request 188 containing the newly detected position data to the electronic pen client 22. In response, the electronic pen client 22 again generates an application location request 190 containing the detected position data and sends the request to the name server 26. The name server 26 determines whether a URL for an application description that corresponds to the newly detected position is available at step 192.

10 If so, the name server 26 sends an application location reply 194 containing a retrieved URL to the electronic pen client 22, which in turn sends an application description request 196 containing the unique pen ID for the electronic pen 10 to the application server 15 30 at the identified URL address, just as previously discussed in connection with messages 128 and 130. In this case, however, it is assumed that the application server 30 determines that the requested application description is unavailable at step 198. As a result, the 20 application server 30 sends an application description reply to the electronic pen client 22 containing an empty application description. In response to the receipt of an empty application description, the electronic pen client

22 unloads the current application at step 202 and sends a new grid reply 204 containing an empty grid description to the electronic pen 10. The electronic pen 10 responds to the receipt of the empty grid description by unloading the
5 current grid description at step 206.

Another possibility is that the name server 26 determines at step 192 that a URL corresponding to the detected position is not available. In this situation, the name server 26 sends an application location reply 208
10 to the electronic pen client 22. The reply 208 may simply be empty to indicate that a URL is not available. Preferably, however, the reply 208 contains a grid exception defining the largest area possible around the detected position for which there is no corresponding URL.
15 In response to the reply 208, the electronic pen client 22 sends a new grid reply 210 containing an empty grid description with a grid exception. Upon receiving the reply 210, the electronic pen 10 unloads the current grid description at step 212. Furthermore, assuming that the
20 electronic pen 10 receives and recognizes the grid exception information, the electronic pen 10 may subsequently be able to determine that certain detected positions on the address pattern are not associated with

any application without having to send a request to the
name server 26 or the application server 30.

To implement the electronic pen 10, there should be
some type of mechanism for allowing the electronic pen 10
5 to determine when to attempt to detect an address pattern,
when to store detected positional information, and/or when
to forward or transmit the detected positions to the
electronic pen client 22. In addition, it is also
desirable to allow a user of the electronic pen 10 to
10 select between inking mode, wherein the electronic pen 10
writes ink or other markings on the paper or other surface
with which the tip of the pen 10 comes into contact, and a
non-inking mode, wherein the electronic pen 10 does not
leave ink marks when the tip of the electronic pen 10
15 comes into contact with paper or other surfaces.

In accordance with the present invention, it is
possible to turn the inking function of the electronic pen
10 on and off. In particular, a user of the electronic
pen 10 can use the pen 10 with an ink cartridge extended
20 in a writing position or with the ink cartridge retracted
so that the electronic pen 10 does not leave ink markings.
The ability to use the pen 10 with its inking function
turned on allows users to keep a paper copy of any

drawings, handwritten text, or other markings made with
their electronic pen 10, while the ability to use the pen
10 in the non-inking mode facilitates use of the pen in
connection with reusable or public data entry sheets or
5 other public or reusable surfaces.

In another aspect of the invention, the electronic
pen 10 can be used to navigate on a mobile phone 14 or
other electronic device, such as a PDA, laptop computer,
or personal computer, or to manipulate, enter, or delete
10 data by writing on a specially formatted paper. In
particular, the electronic pen 10 can relay the written
information to the mobile phone 14 or other electronic
device. This use of the electronic pen 10 and specially
formatted paper permits most messaging and
15 telecommunications control functions to be performed in a
user friendly manner without the use of other devices.
Moreover, actions resulting from the use of the electronic
pen 10 and specially formatted paper can be represented on
a display of the mobile phone 14, PDA, or computer.

20 For example, there is illustrated in FIGURE 11, a
reusable calendar entry sheet 220. It is assumed that the
calendar entry sheet 220 is printed on a paper that
includes a portion of the address pattern (not shown).

Preferably, the address pattern is either not visible to the human eye or is only faintly visible so that the address pattern does not present a significant distraction to users. The sensor in the electronic pen 10, however,
5 can detect the address pattern, and therefore, the precise position of the pen 10 at any given time can be determined, even when the pen is in a non-inking mode. Accordingly, when the electronic pen 10 is used to fill in a date field 222, the motion of the electronic pen 10 over
10 the address pattern can be detected. Then, based on an analysis of the strokes, the handwritten date can be stored and/or converted into text. Similarly, appointment information or other data can be written in the appropriate fields of the calendar 224. By storing the
15 detected positions, generating strokes based on the detected positions, and generating actions based on the strokes, the information written on the calendar can automatically be stored in a calendar application database (located, e.g., in a mobile phone 14 or in a remote
20 server) associated with the user of the electronic pen 10. If desired, information can also be manipulated or deleted in a similar manner. Because the electronic pen 10 is preferably used in a non-inking mode, the calendar entry

sheet 220 can be reused. Furthermore, the same types of functions can be used to enter, delete, and manipulate data in an electronic phone book, task list, or scheduler.

Referring now to FIGURE 12, there is illustrated an example of a reusable phone settings entry sheet 226. As with the previous example, it is assumed that the reusable phone settings entry sheet 226 is intended to be used when the electronic pen 10 is in a non-inking mode. Thus, by simply touching the electronic pen 10 to a desired setting in a ring volume field 228, the ring volume of a phone associated with, or otherwise selected by, the electronic pen 10, can be set. In addition, the electronic pen 10 can be used to select various other setting fields, such as a ring melody field 230, a greeting field 232, a phonebook entry field 234 for entering names and numbers into the phone internal memory, and fields relating to any other desired settings. When the electronic pen 10 is used to select or to enter information into these fields, such selections or entered information can be transmitted by the electronic pen 10 to the electronic pen client 22 contained within, for instance, a mobile phone 14.

Although the invention is described primarily in connection with a reusable calendar sheet 220 and a

reusable phone setting entries sheet 226 in a non-inking mode, the invention is not limited to these applications. Instead, the electronic pen 10 can also be used for such data entry and storage when it is in an inking mode and
5 can be used in connection with specially formatted paper to input any type of printed text or pattern in either the inking or non-inking mode. For example, the electronic pen 10 and an appropriately formatted paper or papers could also be used for navigating on a phone menu, dialing
10 a number by writing it in a predefined "dialing" field, writing a message that is converted to a short message service (SMS) message, telefax, or email message in the phone or in the electronic pen client 22, or saving notes in the phone 14 or in the electronic pen client 22 in the
15 form of graphical or ASCII text, characters, and/or pictures. Similarly, the preprinted paper can comprise a calendar, phone book, or other type of personal information manager application, or the preprinted paper can be formatted to facilitate entry of settings in a
20 phone, personal computer, or other electronic device capable of communicating with electronic pen 10.

In accordance with another aspect of the present invention, the electronic pen 10 includes a paper touch

sensor, or force sensitive detector, for determining when the electronic pen 10 is in contact with the paper. Preferably, the paper touch sensor is used to enable and disable the position sensing mechanism in the electronic pen 10 depending upon whether the electronic pen 10 is in contact with either a paper or other surface, regardless of whether the electronic pen 10 is in an inking or non-inking mode. For example, the paper touch sensor can be used to enable the position FIFO Block 38 shown in FIGURE 7 when it senses that the electronic pen 10 is in contact with a paper or other surface and can be used to disable the position FIFO Block 38 when the paper touch sensor detects that the electronic pen 10 is not in contact with any surface. Accordingly, the electronic pen 10 will detect positions and generate strokes and actions only when the paper touch sensor detects that the electronic pen 10 is in contact with a paper or other surface.

Referring now to FIGURES 13A and 13B, there is illustrated an electronic pen 10 having a paper touch sensor 236 for detecting whether the electronic pen 10 is in contact with a paper 240 or other surface regardless of whether an ink cartridge 238 is in an extended, or ink-on, position (FIGURE 13A) or in a retracted, or ink-off,

position (FIGURE 13B). Alternatively, instead of using an ink cartridge 238, the electronic pen 10 can utilize a pencil lead, a felt-tip marker, or any other type of marking tip for writing on paper or other surfaces.

5 And yet another aspect of the present invention, the electronic pen 10 can be used to perform a mouse function. Accordingly, the electronic pen 10 can be used for navigation purposes (e.g., in a navigation field) when the paper touch sensor 236 detects that the electronic pen 10
10 is in contact with a paper 240 or other surface. In addition, a selection at a particular location can be indicated by "clicking" the tip of the electronic pen 10 against the paper 240 or other surface either by tapping the tip of the electronic pen 10 against the paper 240 or
15 other surface or by pressing the tip of the electronic pen tip against the paper 240 or other surface with additional force (i.e., a force greater than a predetermined threshold force). When using the electronic pen 10 to perform a mouse-like function, the ability to retract the
20 ink cartridge 238 provides an additional benefit in that the electronic pen 10 is not writing and the ink cartridge 238 is not damaged when the user "clicks" the electronic pen 10.

Although various preferred embodiments of the method and apparatus of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it is understood that
5 the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications, and substitutions without departing from the spirit of the invention as set forth and defined by the following claims. Furthermore, it shall be understood that the
10 terms "comprises" and "comprising," when used in the foregoing Detailed Description and the following claims, specifies the presence of stated features, elements, steps, or components but does not preclude the presence or addition of one or more other features, elements, steps,
15 components, or groups thereof.

WHAT IS CLAIMED IS:

1 1. A system for electronic data entry, comprising:
2 an electronic reading device, including:
3 an optical detector for detecting a portion
4 of a predefined address pattern on a specially
5 formatted surface to the electronic reading device;
6 and
7 a transmitter for transmitting data
8 relating to the detected portion of the predefined
9 address pattern;
10 a separate electronic device for receiving the
11 transmitted data and for performing a function
12 corresponding to an area of the predefined address pattern
13 that includes the detected portion of the address pattern.

1 2. The system of claim 1, wherein the transmitter
2 comprises a cable.

1 3. The system of claim 1, wherein the transmitter
2 transmits information via a local wireless link.

1 4. The system of claim 3, wherein the local
2 wireless link comprises a Bluetooth radio interface.

1 5. The system of claim 1, wherein the separate
2 electronic device is selected from the group consisting of
3 a mobile phone, a personal digital assistant, a
4 television, and a personal computer.

1 6. The system of claim 5, wherein the function
2 comprises manipulating at least one setting for the
3 separate electronic device.

1 7. The system of claim 5, wherein the function
2 comprises navigating an options menu for the separate
3 electronic device.

1 8. The system of claim 7, wherein a display on the
2 separate electronic device displays at least a portion of
3 the options menu.

1 9. The system of claim 1, wherein the optical
2 detector detects a plurality of locations on the
3 predefined address pattern corresponding to at least one
4 image formed by the electronic reading device on the
5 specially formatted surface, the transmitter transmits
6 data relating to the plurality of detected locations, and
7 the separate electronic device receives the transmitted
8 data and uses the received data in performing the
9 function.

1 10. The system of claim 9, wherein the at least one
2 image comprises at least one handwritten character.

1 11. The system of claim 9, wherein the separate
2 electronic device comprises a mobile phone.

1 12. The system of claim 11, wherein the mobile phone
2 converts the received data into one of a short message
3 service (SMS) message, a telefax, and an electronic mail.

1 13. The system of claim 11, wherein the at least one
2 image comprises a handwritten telephone number, the mobile
3 phone operating to dial the telephone number.

1 14. The system of claim 8, wherein the specially
2 formatted surface comprises a calendar manipulation form,
3 the separate electronic device converting the received
4 data into data for entry in a calendar stored in the
5 separate electronic device.

1 15. The system of claim 8, wherein the specially
2 formatted surface comprises an email form, the separate
3 electronic device operating to convert the received data
4 into an email for transmission by the separate electronic
5 device.

1 16. The system of claim 8, wherein the specially
2 formatted surface comprises a phonebook manipulation form,
3 the separate electronic device converting the received
4 data into data for entry in a phonebook stored in the
5 separate electronic device.

1 17. The system of claim 8, wherein the separate
2 electronic device stores the received data in the form of
3 a graphical image.

1 18. The system of claim 8, wherein the separate
2 electronic device converts the received data into text.

1 19. The system of claim 8, wherein the specially
2 formatted surface comprises a task list manipulation form,
3 the separate electronic device converting the received
4 data into data for entry in a task list stored in the
5 separate electronic device.

007E07 464E0460

1 20. A method for data entry using an electronic
2 reading device, comprising the steps of:
3 detecting at least one position of an electronic
4 reading device relative to a predefined address pattern on
5 a specially formatted surface;
6 transmitting data relating to the at least one
7 detected position;
8 receiving the transmitted data; and
9 performing an operation using the received data,
10 said operation corresponding to an area that contains the
11 at least one detected position.

1 21. The method of claim 20, wherein the operation
2 comprises manipulating settings for a mobile device.

1 22. The method of claim 20, wherein the operation
2 comprises navigating in an options menu of a mobile phone.

1 23. The method of claim 20, wherein the operation
2 comprises entering data corresponding to the at least one
3 detected position in an electronic calendar.

1 24. The method of claim 20, wherein the operation
2 comprises converting the at least one detected position
3 into a short message service (SMS) message.

1 25. The method of claim 20, wherein the at least one
2 detected position corresponds to a handwritten telephone
3 number, the operation comprising converting the at least
4 one detected position into the telephone number.

1 26. The method of claim 20, wherein the operation
2 comprises converting the at least one detected position
3 into an email message.

1 27. The method of claim 20, wherein the operation
2 comprises entering data corresponding to the at least one
3 detected position in an electronic phone book.

1 28. The method claim 20, wherein the at least one
2 detected position corresponds to handwritten information,
3 the operation comprising saving the information in a
4 memory.

1 29. The method of claim 20, wherein the operation
2 comprises entering data corresponding to the at least one
3 detected position in an electronically stored task list.

1 30. The method of claim 20, wherein the step of
2 transmitting data relating to the at least one detected
3 position comprises transmitting the data via a local
4 wireless link.

1 31. An electronic data entry system, comprising:
2 a formatted paper having printed thereon a
3 predefined address pattern;
4 an electronic reading device for detecting
5 portions of the predefined address pattern and relaying
6 information relating to the detected portions of the
7 predefined address pattern; and
8 a mobile phone for receiving the relayed
9 information, wherein a user of the mobile phone can
10 utilize the relayed information to execute a function
11 within the mobile phone.

1 32. A method of using an electronic reading device,
2 comprising the steps of:
3 detecting information written with an electronic
4 reading device on formatted paper that includes a
5 predefined address pattern;
6 relaying the detected information to a mobile
7 phone; and
8 utilizing the relayed information to execute a
9 function within the mobile phone.

ABSTRACT OF THE DISCLOSURE

5 A method and system for electronic data entry using
an electronic reading device that detects at least one
position of the electronic reading device relative to a
predefined address pattern of a specially formatted
surface. Data relating to the at least one detected
position is transmitted, preferably via a wireless
interface using a radio transceiver. The data is received
by a separate electronic device that performs an operation
10 using the received data, wherein the operation corresponds
to an area on the address pattern that contains the at
least one detected position.

The diagram illustrates a network architecture for a mobile reading system. It includes the following components and connections:

- Electronic Reading Device (10):** A handheld device with a screen and buttons, connected to the Reading Device Client.
- Reading Device Client (22):** A mobile device (e.g., PDA or smartphone) that acts as a bridge between the Electronic Reading Device and the Base Translator.
- Name Server (26):** Represented by a circle with an upward arrow and the letter 'N', connected to the Reading Device Client.
- Control (24):** A desktop computer system (monitor and base unit) connected to the Reading Device Client.
- Base Translator (28):** A vertical server rack unit connected to the Reading Device Client and the Application Server.
- Application Server (30):** A server unit connected to the Base Translator.

Handwritten annotations include a squiggly line labeled '2' pointing towards the Name Server, and a large 'F' at the bottom right corner of the page.

FIG. 2

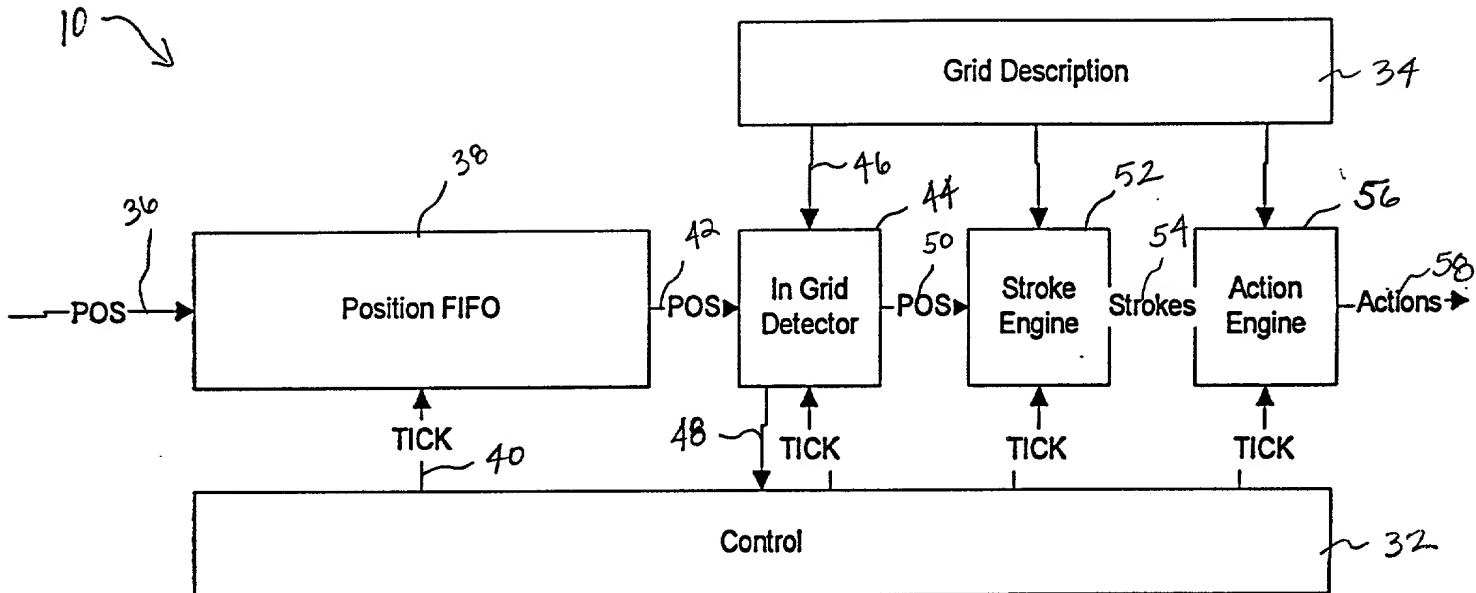


FIG. 7

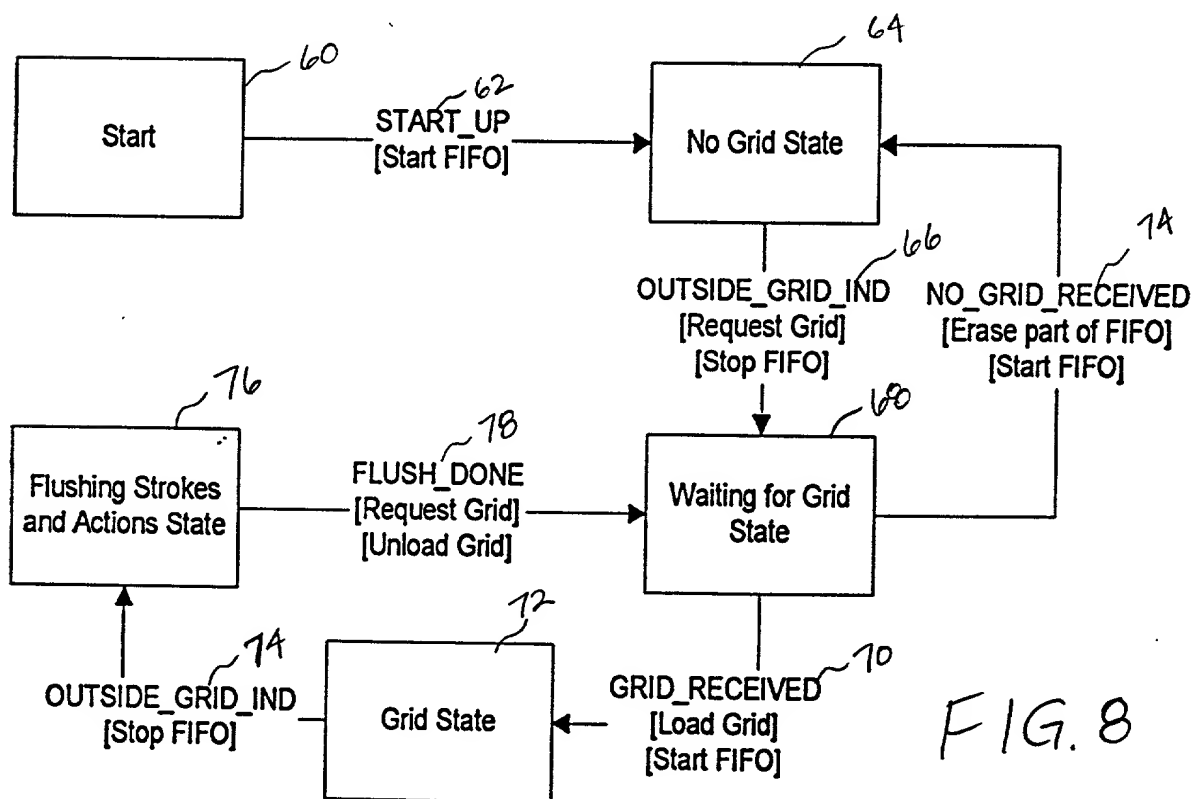


FIG. 8


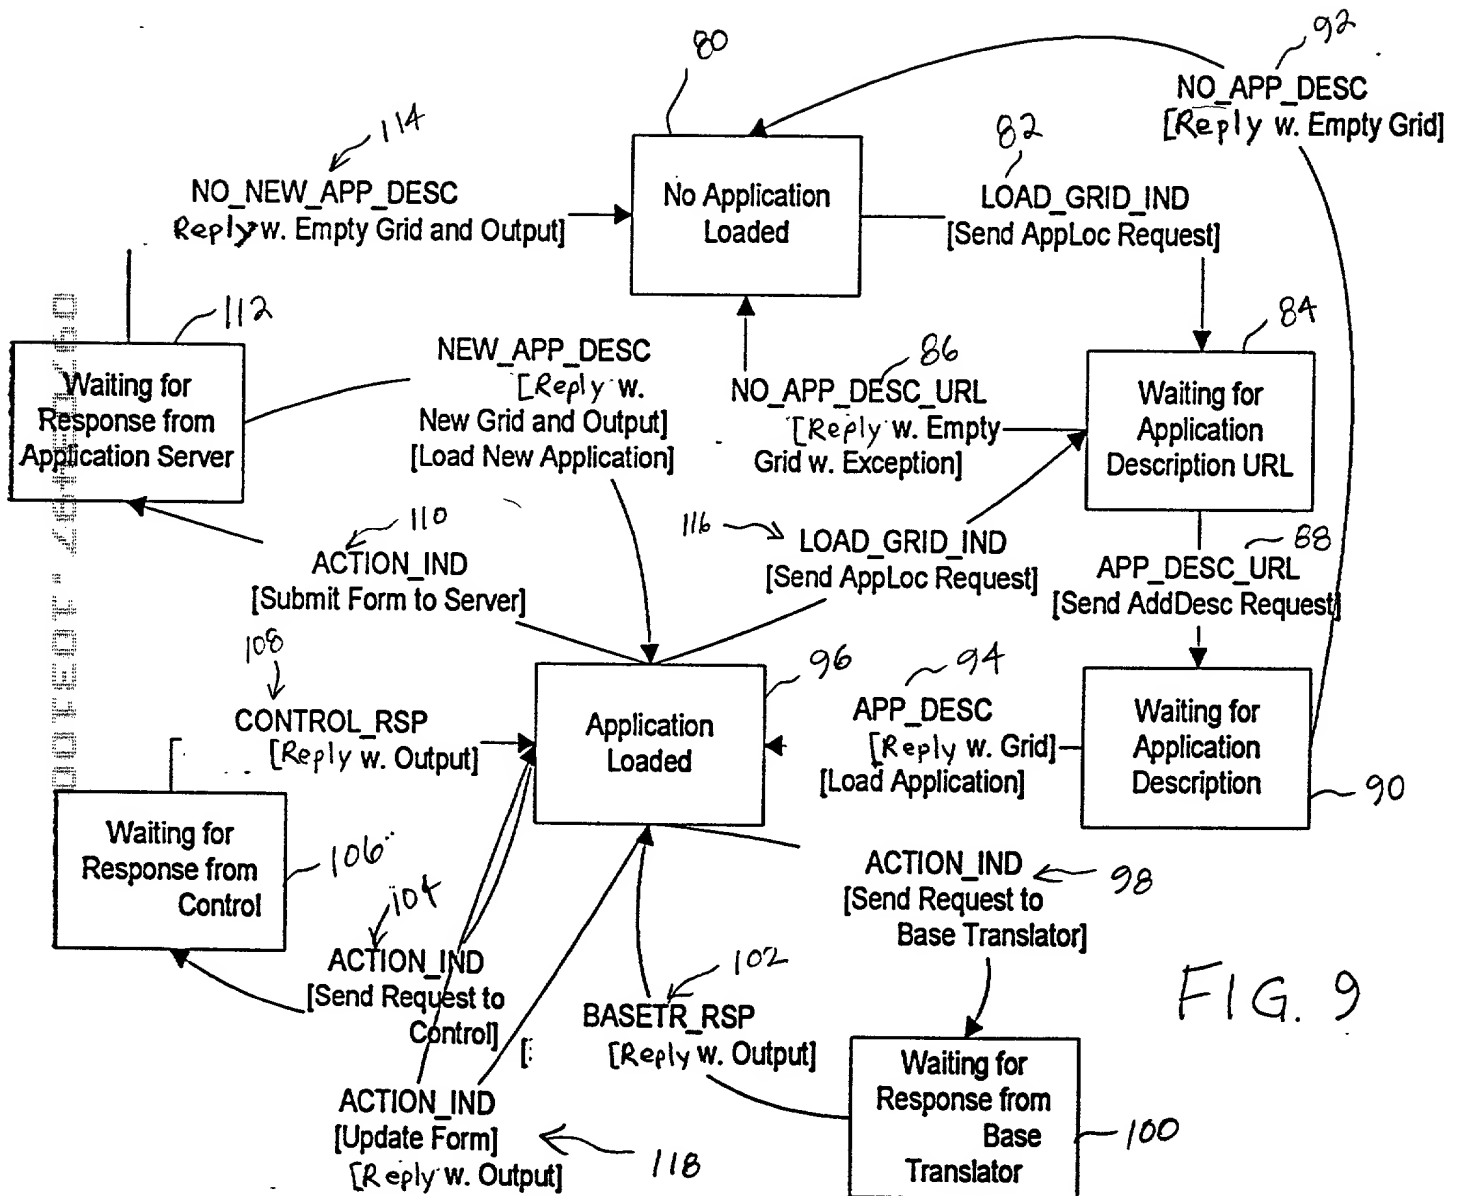


FIG. 9

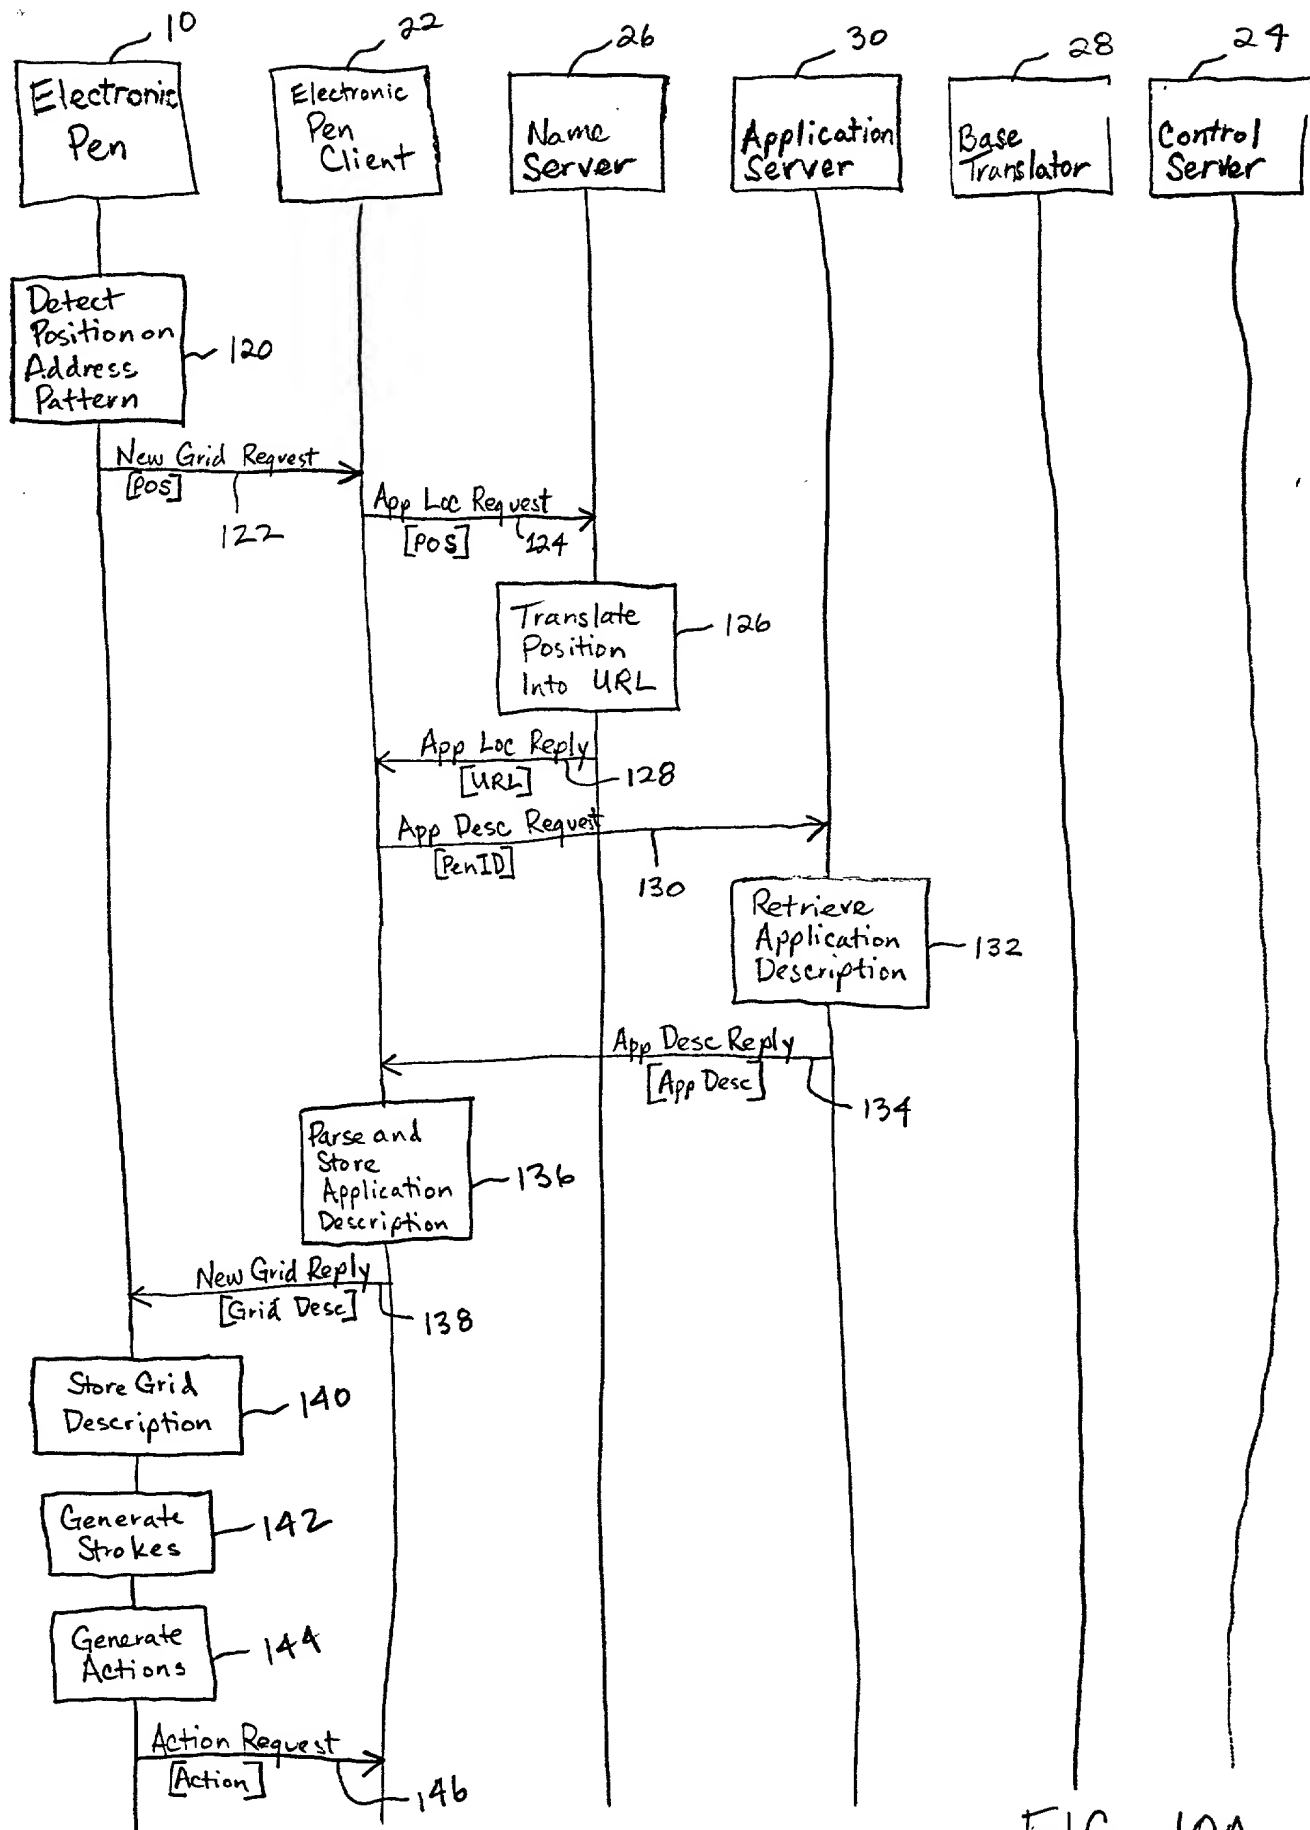

F|G. 10A

007044974000

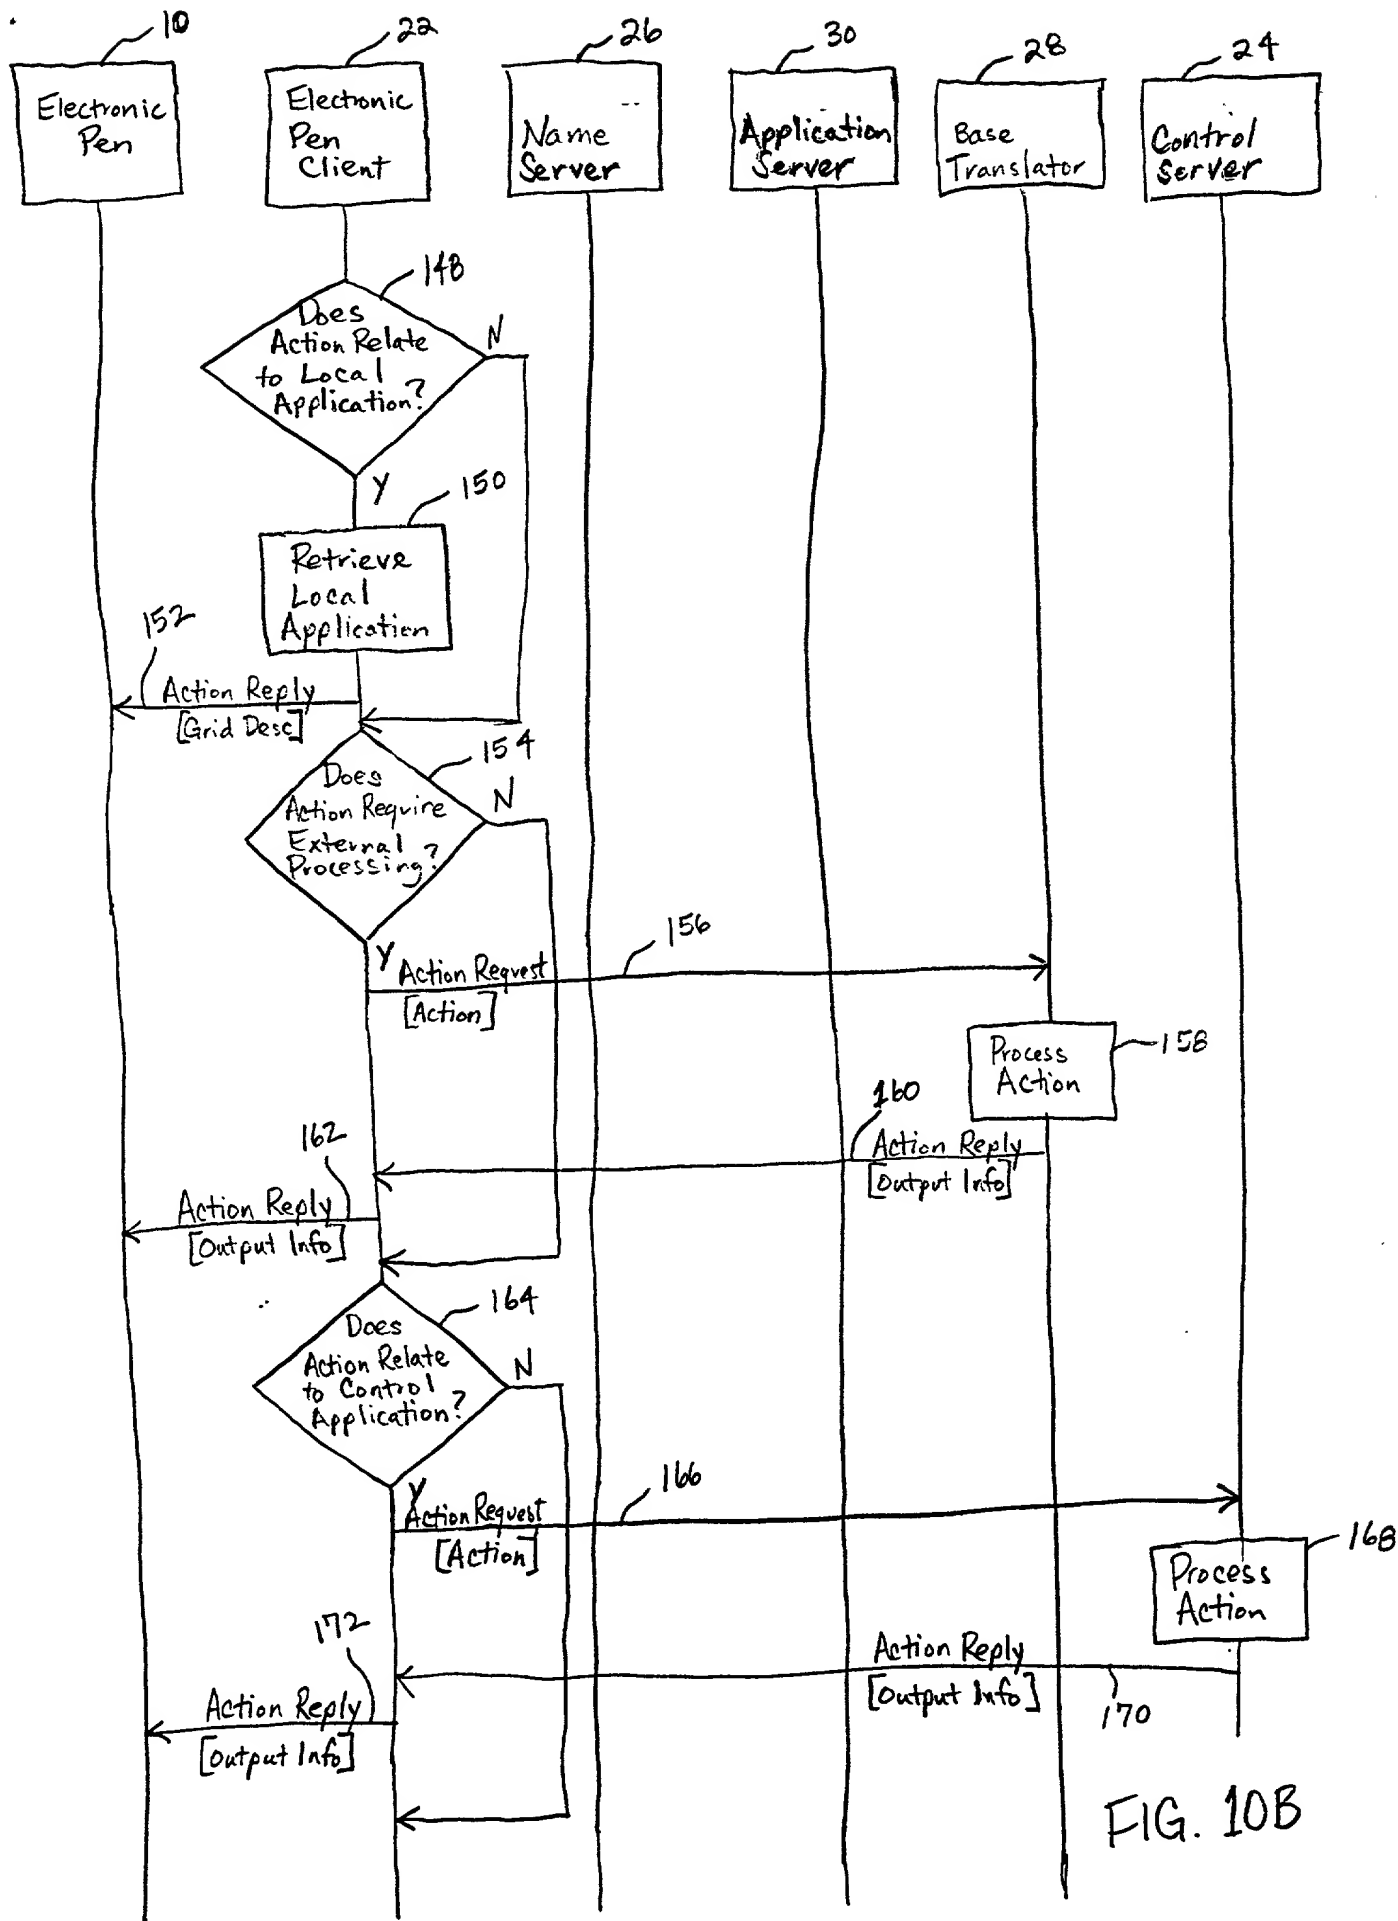


FIG. 10B

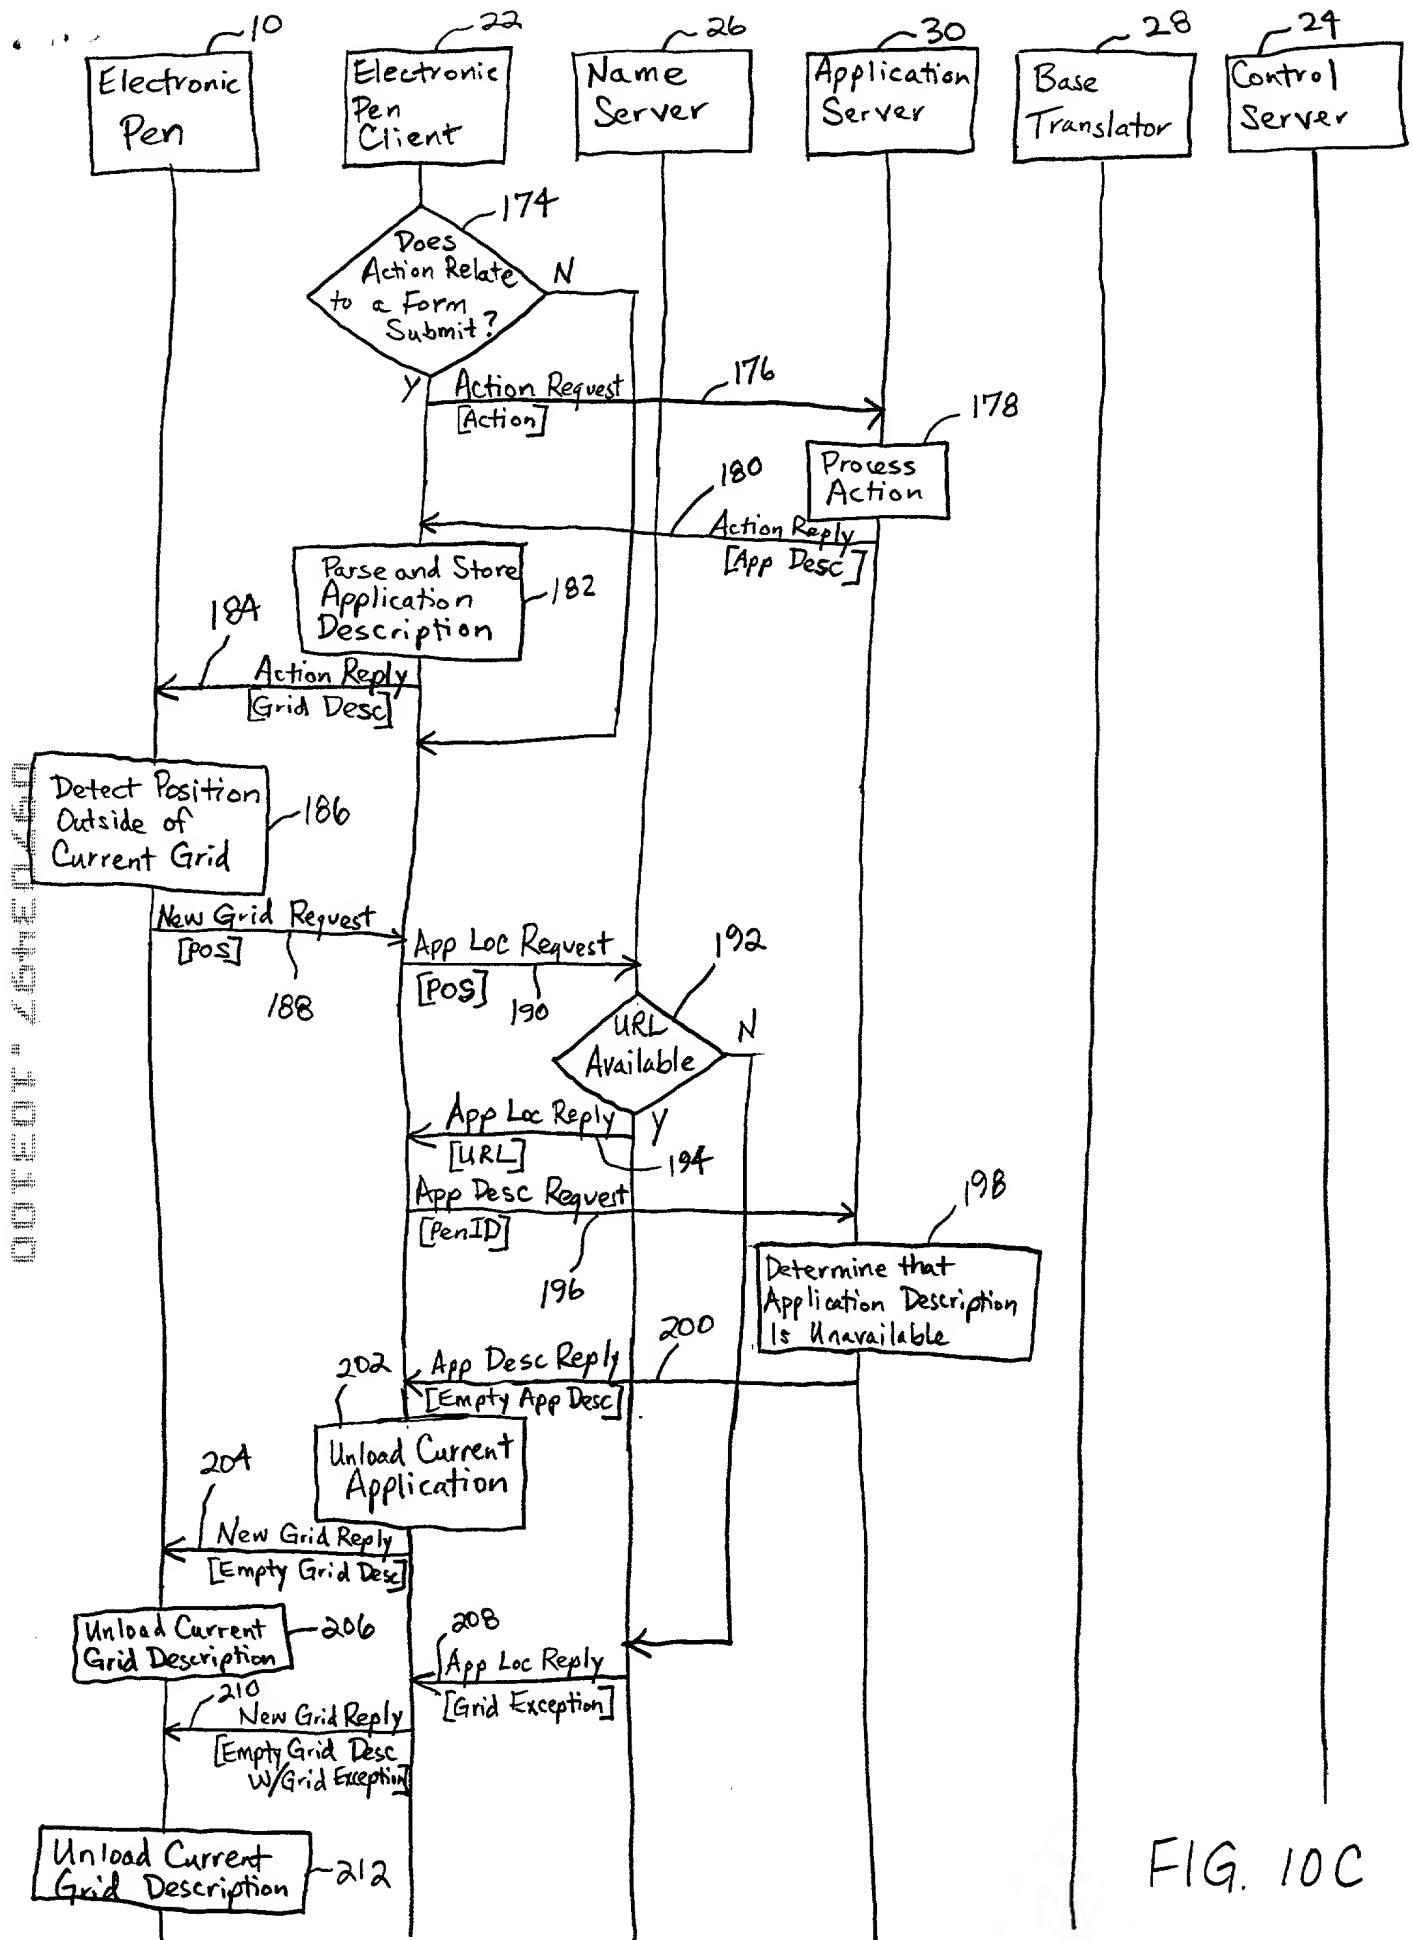


FIG. 10C

007607 46450450

REUSABLE CALENDAR ENTRY SHEET (PLEASE NO INK)

← 220

DATE: ← 222
Day Mo. Yr.

	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
0800							
1000							
1200							
1400							
1600							
1700							

← 224

FIG. 11

REUSABLE PHONE SETTINGS ENTRY SHEET (PLEASE NO INK)

← 226

Ring Volume  ← 228

Ring Melody  ← 230

Greeting ← 232

Phone Memory:

NAME

NUMBER ← 234

FIG. 12

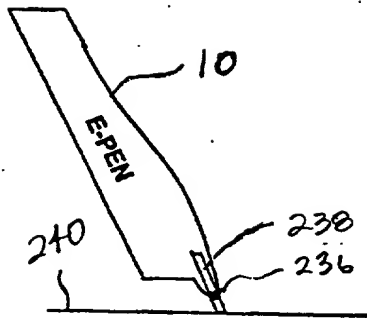


FIG. 13A

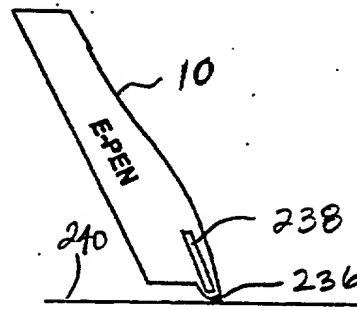


FIG. 13B

00703497, 103400

RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SPECIALLY FORMATTED PAPER BASED APPLICATIONS OF A MOBILE PHONE**, the specification of which: (mark only one)

- ☐ (a) is attached hereto.
- ☐ (b) was filed on _ as Application Serial No. _ and was amended on _____ (if applicable)
- ☐ (c) was filed as PCT International Application No. PCT/ _____ on _____ and was amended on _____ (if applicable).
- ☐ (d) was filed on _ as Application Serial No. _ and was issued a Notice of Allowance on _____.
- ☒ (e) was filed on October 31, 2000 bearing attorney docket number 34650-566PT.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application

on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year</u> <u>Filed</u>	<u>Date first</u> <u>laid-open or</u> <u>Published</u>	<u>Date</u> <u>patented or</u> <u>Granted</u>	<u>Priority Claimed</u> <u>Yes</u> <u>No</u>
NONE					

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>
60/182,742	February 16, 2000
60/190,343	March 16, 2000
60/192,662	March 28, 2000

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status(pending, abandoned, patented)</u>
NONE		

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493
BENJAMIN J. BAI, Reg. No. 43,481
MICHAEL J. BLANKSTEIN, Reg. No. 37,097
MARY JO BOLDINGH, Reg. No. 34,713
MARGARET A. BOULWARE, Reg. No. 28,708
ARTHUR J. BRADY, Reg. No. 42,356
MATTHEW O. BRADY, Reg. No. 44,554
DANIEL J. BURNHAM, Reg. No. 39,618
THOMAS L. CANTRELL, Reg. No. 20,849
RONALD B. COOLLEY, Reg. No. 27,187
THOMAS L. CRISMAN, Reg. No. 24,846
STUART D. DWORK, Reg. No. 31,103
WILLIAM F. ESSER, Reg. No. 38,053
ROGER J. FRENCH, Reg. No. 27,786
JANET M. GARETTO, Reg. No. 42,568
JOHN C. GATZ, Reg. No. 41,774
RUSSELL J. GENET, Reg. No. 42,571

GERALD H. GLANZMAN, Reg. No. 25,035
J. KEVIN GRAY, Reg. No. 37,141
STEVEN R. GREENFIELD, Reg. No. 38,166
JOSHUA A. GRISWOLD, Reg. No. 46,310
J. PAT HEPTIG, Reg. No. 40,643
SHARON A. ISRAEL, Reg. No. 41,867
JOHN R. KIRK JR., Reg. No. 24,477
PAUL R. KITCH, Reg. No. 38,206
TIMOTHY M. KOWALSKI, Reg. No. 44,192
JAMES F. LEA III, Reg. No. 41,143
HSIN-WEI LUANG, Reg. No. 44,213
ROBERT W. MASON, Reg. No. 42,848
ROGER L. MAXWELL, Reg. No. 31,855
ROBERT A. McFALL, Reg. No. 28,968
STEVEN T. McDONALD, Reg. No. 45,999
LISA H. MEYERHOFF, Reg. No. 36,869
STANLEY R. MOORE, Reg. No. 26,958
RICHARD J. MOURA, Reg. No. 34,883
MARK V. MULLER, Reg. No. 37,509
P. WESTON MUSSELMAN JR. Reg. No. 31,644

DANIEL G. NGUYEN, Reg. No. 42,933
SPENCER C. PATTERSON, Reg. No. 43,849
RUSSELL N. RIPPAMONTI, Reg. No. 39,521
ROSS T. ROBINSON, Reg. No. 47,031
STEPHEN G. RUDISILL, Reg. No. 20,087
HOLLY L. RUDNICK, Reg. No. 43,065
J.L. JENNIE SALAZAR, Reg. No. 45,065
KEITH W. SAUNDERS, Reg. No. 41,462
JERRY R. SELINGER, Reg. No. 26,582
ZACHARY J. SMOLINSKI, Reg. No. 47,100
GARY B. SOLOMON, Reg. No. 44,347
STEVE Z. SZCZEPANSKI, Reg. No. 27,957
ANDRE M. SZUWALSKI, Reg. No. 35,701
ALAN R. THIELE, Reg. No. 30,694
TAMSEN VALOIR, Reg. No. 41,417
RAYMOND VAN DYKE, Reg. No. 34,746
BRIAN D. WALKER, Reg. No. 37,751
GERALD T. WELCH, Reg. No. 30,332
HAROLD N. WELLS, Reg. No. 26,044
WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, a Professional Corporation**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Richard J. Moura, Esq.
Jenkins & Gilchrist, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4500
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Anders Borgström		
	Full Name	Inventor's Signature	Date
	V. Gyeholmsvägen 17A SE-239 32 SKANÖR, Sweden Residence (city, state, country)		Sweden Citizenship
	V. Gyeholmsvägen 17A SE-239 32 SKANÖR, Sweden Post Office Address (include zip code)		

(FOR ADDITIONAL INVENTORS, check here X and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)

Figure 1 consists of 12 bar charts, each representing a different demographic or marital category. The x-axis for all charts represents age groups: 18-24, 25-34, 35-44, 45-54, 55-64, and 65+. The y-axis represents the percentage of respondents, ranging from 0% to 100%.

- 1. Total:** Shows a general upward trend from approximately 15% in the 18-24 group to 45% in the 65+ group.
- 2. Male:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 3. Female:** Shows a general upward trend from approximately 10% in the 18-24 group to 45% in the 65+ group.
- 4. White:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 5. Black:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 6. Hispanic:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 7. Asian:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 8. Pacific Islander:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 9. Other:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 10. Married:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 11. Single:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.
- 12. Divorced:** Shows a general upward trend from approximately 10% in the 18-24 group to 40% in the 65+ group.

2	Magnus Hollström		
	Full Name	Inventor's Signature	Date
	Filippavägen 6A SE-222 41 LUND, Sweden Residence (city, state, country) <div style="text-align: right;"> Citizenship Sweden </div>		
	Filippavägen 6A SE-222 41 LUND, Sweden Post Office Address (include zip code)		

001501 4440/60

3	Torbjörn Gärdenfors		
	Full Name	Inventor's Signature	Date
	Kornettsgatan 24A SE-211 50 MALMÖ, Sweden		
	Residence (city, state, country)	Sweden Citizenship	
	Kornettsgatan 24A SE-211 50 MALMÖ, Sweden		
	Post Office Address (include zip code)		